


PSL

Professional Sound Light srl

LED PROFILE WHITE LIGHT

CE
IP20

COD.E0027

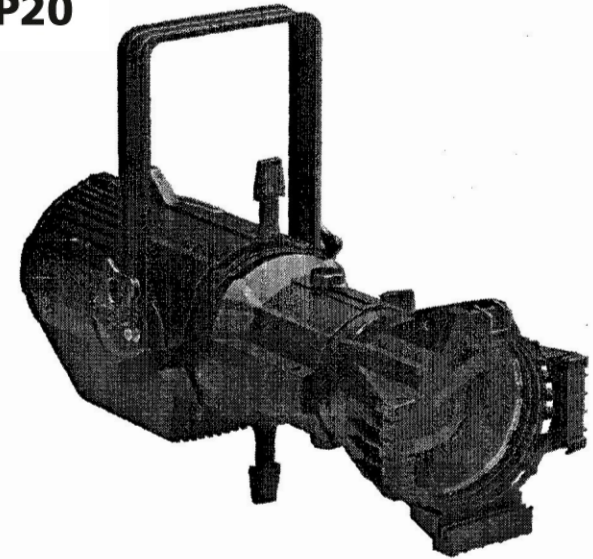

MANUALE DI SERVIZIO



IP 20



LED Profile Light


[Professional Sound Light srl- via Piane 27- 47853 Coriano \(RN\)](http://www.prosoundlight.it)
[tel 0541 660721 - inf@prosoundlight.it](mailto:inf@prosoundlight.it) www.prosoundlight.it

LED PROFILE WHITE LIGHT

6. Technical parameters

LED Source	1XWhite 200W LED (3200K),CRI
Optical group	Beam angle :19° (Beam angle 26° ,36° ,50° available) with high-efficiency optical system
Control	3 DMX channels;LCD display+4 soft keys;4 selectable dimming curves
Connection	PowerconIn & Out; 3-pole DMX In & Out (5-pole DMX available)
Voltage	Electronic full-range AC 100-240V 50/60Hz
Max Power	200W
Measurements	Size: 64.5X28X22cm Weight: 7Kg


7. Control Panel

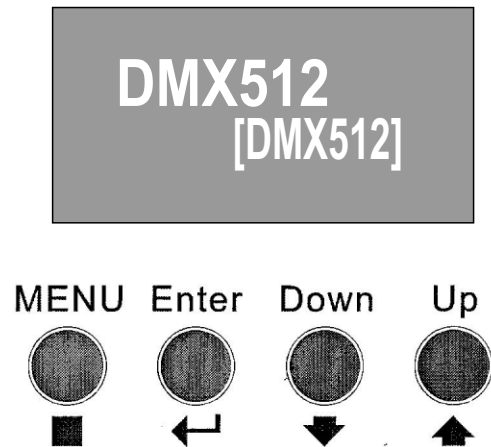

- Adjust keys function on panel
- Press "MENU" --->Display first-level menu--->
Press "Enter" --->Display second-level menu--->
Press "Down" & "Up" to adjust relevant function--->
Press "Enter" and "MENU" to quit current menu--->
Press "MENU" --->To next first-level menu...


LED PROFILE WHITE LIGHT

8. Menu

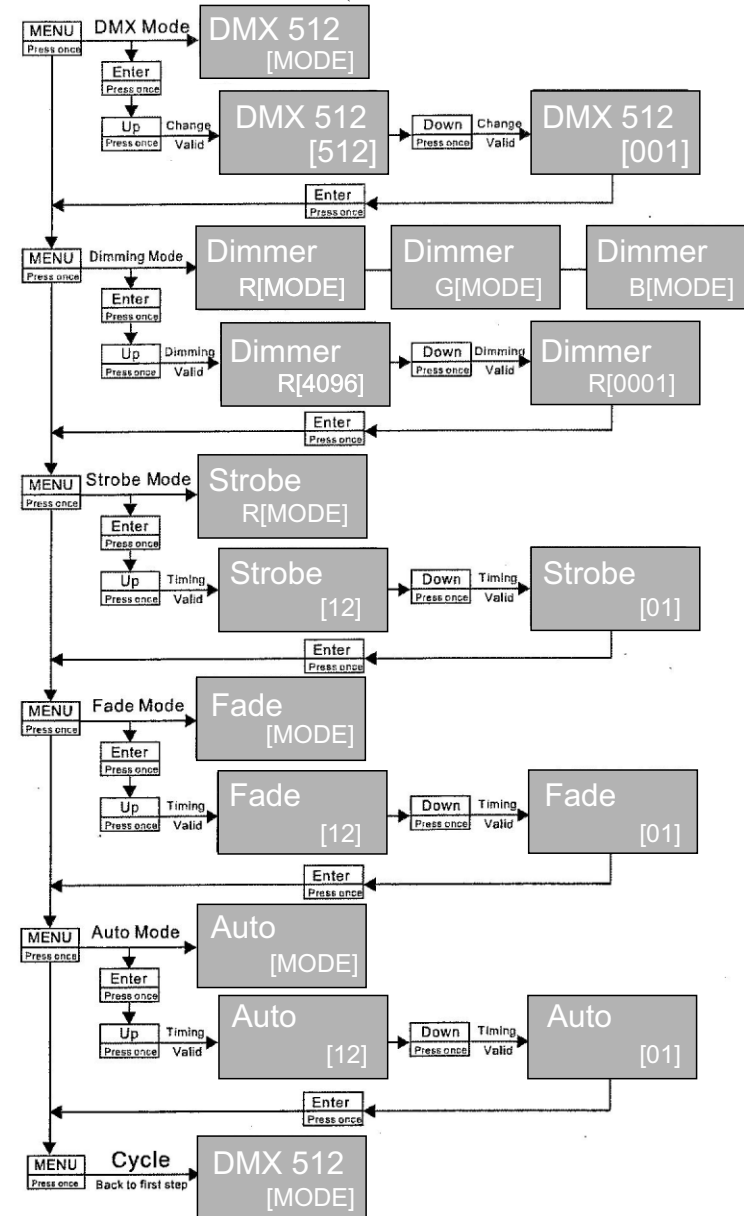


LED PROFILE WHITE LIGHT


1.Packing List



LED Profile Light





Power Cable





Manual

2.Measurements

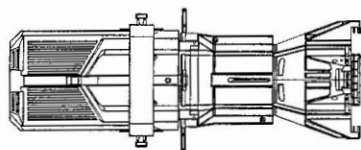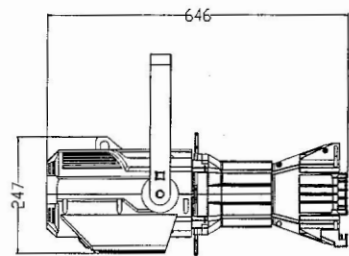

Unit: mm

3.Wiring Diagram

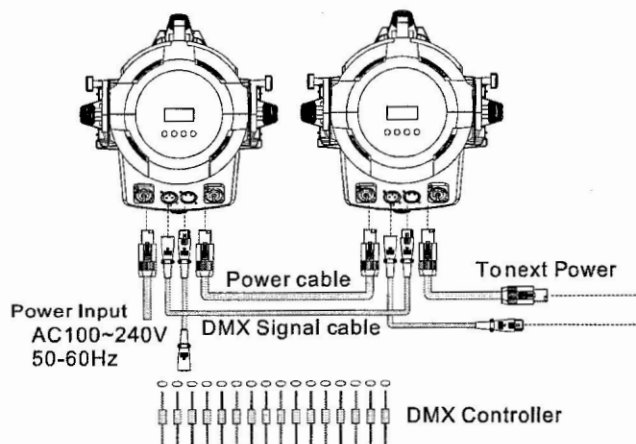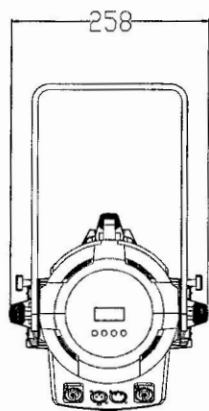

LED PROFILE WHITE LIGHT

10.Notes

Notes section with 10 horizontal dashed lines for writing.

LED PROFILE WHITE LIGHT

9.Function

DMX Mode

DMX 512
[MODE]

DMX 512
[001]

DMX 512
[512]

DMX Address Allocation: 001-512

DMX 3 Channels

CH	1	2	3
0%	DIMMING	STROBE	Dim4
100%	ALL DIMMING	STROBE	255
75%			192
50%			128
25%			64
0%		10 Invalid	0

Dimming Mode

Dimmer
[MODE]

Dimmer
[0001]

Dimmer
[4096]

Brightness adjust: 0001-4096 Dimming

Strobe Mode

Strobe
[MODE]

Strobe
[01]

Strobe
[12]

Strobe/Speed : 01-12 Dimming

Master/Slave Setting


1, Master: Dimming Mode/ Strobe Mode

2, All Salves: DMX001 (as below)

DMX 512
[001]

LED PROFILE WHITE LIGHT

4.Illumination Diagram

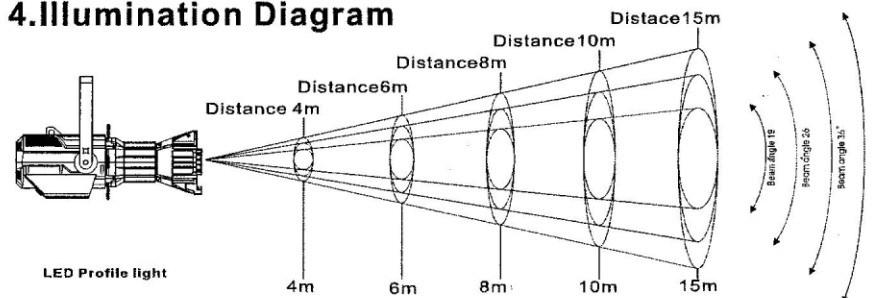

LED Profile light

CCT 3200K

Parameter	19°	26°	36°	50°
Illumination Center/Lux	3100	1390	870	680
Beam Diameter/cm	124	180	248	315
Illumination Center/Lux	1850	830	698	590
Beam Diameter/cm	185	277	370	462
Illumination Center/Lux	1100	756	526	405
Beam Diameter/cm	220	380	430	620
Illumination Center/Lux	695	360	203	160
Beam Diameter/cm	373	560	746	1400


CCT 6500K

Parameter	19°	26°	36°	50°
Illumination Center/Lux	3410	1585	960	756
Beam Diameter/cm	124	180	248	315
Illumination Center/Lux	1950	905	786	650
Beam Diameter/cm	185	277	370	462
Illumination Center/Lux	1210	840	630	518
Beam Diameter/cm	220	380	430	620
Illumination Center/Lux	750	425	290	218
Beam Diameter/cm	373	560	746	1400

5.Installation



Floor

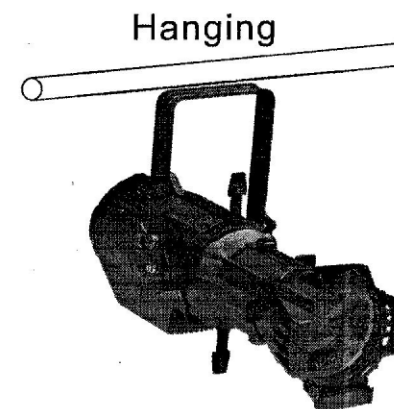

Hanging